




HPF-30MA HIGH PASS FILTER SPECIFICATIONS (PREVIEW)

<p>Customer: TKI Smp.NO: CS-20160516-1</p>		<p>PICTURE</p> 																																										
<p>◆ MECHANICAL SPECIFICATIONS</p> <table border="1"> <thead> <tr> <th><u>ITEM</u></th> <th><u>DESCRIPTION</u></th> <th><u>UNIT</u></th> </tr> </thead> <tbody> <tr> <td>Housing</td> <td>Copper Tube</td> <td></td> </tr> <tr> <td>Connector</td> <td>75Ω, Male & Female "F" type</td> <td></td> </tr> <tr> <td>Connector Screw Thread</td> <td>W 3/8"-32UNEF</td> <td>inch</td> </tr> <tr> <td>Dimensions</td> <td>13(φ)×41(L)</td> <td>mm</td> </tr> <tr> <td>Net Weight</td> <td>18</td> <td>g</td> </tr> </tbody> </table>		<u>ITEM</u>	<u>DESCRIPTION</u>	<u>UNIT</u>	Housing	Copper Tube		Connector	75Ω, Male & Female "F" type		Connector Screw Thread	W 3/8"-32UNEF	inch	Dimensions	13(φ)×41(L)	mm	Net Weight	18	g	<p>Label</p> <table border="1"> <tr> <td> <p>High Pass Filter HPF-30MA MADE IN TAIWAN</p> </td> </tr> </table>			<p>High Pass Filter HPF-30MA MADE IN TAIWAN</p>																					
<u>ITEM</u>	<u>DESCRIPTION</u>	<u>UNIT</u>																																										
Housing	Copper Tube																																											
Connector	75Ω, Male & Female "F" type																																											
Connector Screw Thread	W 3/8"-32UNEF	inch																																										
Dimensions	13(φ)×41(L)	mm																																										
Net Weight	18	g																																										
<p>High Pass Filter HPF-30MA MADE IN TAIWAN</p>																																												
<p>◆ ELECTRICAL SPECIFICATIONS</p> <table border="1"> <thead> <tr> <th><u>ITEM</u></th> <th><u>MIN</u></th> <th><u>TYP</u></th> <th><u>MAX</u></th> <th><u>UNIT</u></th> </tr> </thead> <tbody> <tr> <td>Frequency Range</td> <td></td> <td>5~1000</td> <td></td> <td>MHz</td> </tr> <tr> <td>Impedance</td> <td></td> <td>75</td> <td></td> <td>Ω</td> </tr> <tr> <td>Pass Band</td> <td></td> <td>30~1000</td> <td></td> <td>MHz</td> </tr> <tr> <td>Insertion Loss (30~1000 MHz)</td> <td></td> <td>0.8</td> <td>2.0</td> <td>dB</td> </tr> <tr> <td>Return Loss (30~1000 MHz)</td> <td>16</td> <td>20</td> <td></td> <td>dB</td> </tr> <tr> <td>Stop Band</td> <td></td> <td>5~16</td> <td></td> <td>MHz</td> </tr> <tr> <td>Rejection (5~16MHz)</td> <td>40</td> <td>45</td> <td></td> <td>dB</td> </tr> </tbody> </table>		<u>ITEM</u>	<u>MIN</u>	<u>TYP</u>	<u>MAX</u>	<u>UNIT</u>	Frequency Range		5~1000		MHz	Impedance		75		Ω	Pass Band		30~1000		MHz	Insertion Loss (30~1000 MHz)		0.8	2.0	dB	Return Loss (30~1000 MHz)	16	20		dB	Stop Band		5~16		MHz	Rejection (5~16MHz)	40	45		dB			
<u>ITEM</u>	<u>MIN</u>	<u>TYP</u>	<u>MAX</u>	<u>UNIT</u>																																								
Frequency Range		5~1000		MHz																																								
Impedance		75		Ω																																								
Pass Band		30~1000		MHz																																								
Insertion Loss (30~1000 MHz)		0.8	2.0	dB																																								
Return Loss (30~1000 MHz)	16	20		dB																																								
Stop Band		5~16		MHz																																								
Rejection (5~16MHz)	40	45		dB																																								

MODEL NO.	DATE	PREVIEW	PAGE/TOTAL
HPF-30MA High Pass Filter	20160516	V1.1	1/3



HPF-30MA

Insertion Loss, Rejection and Return Loss

Span: 100MHz

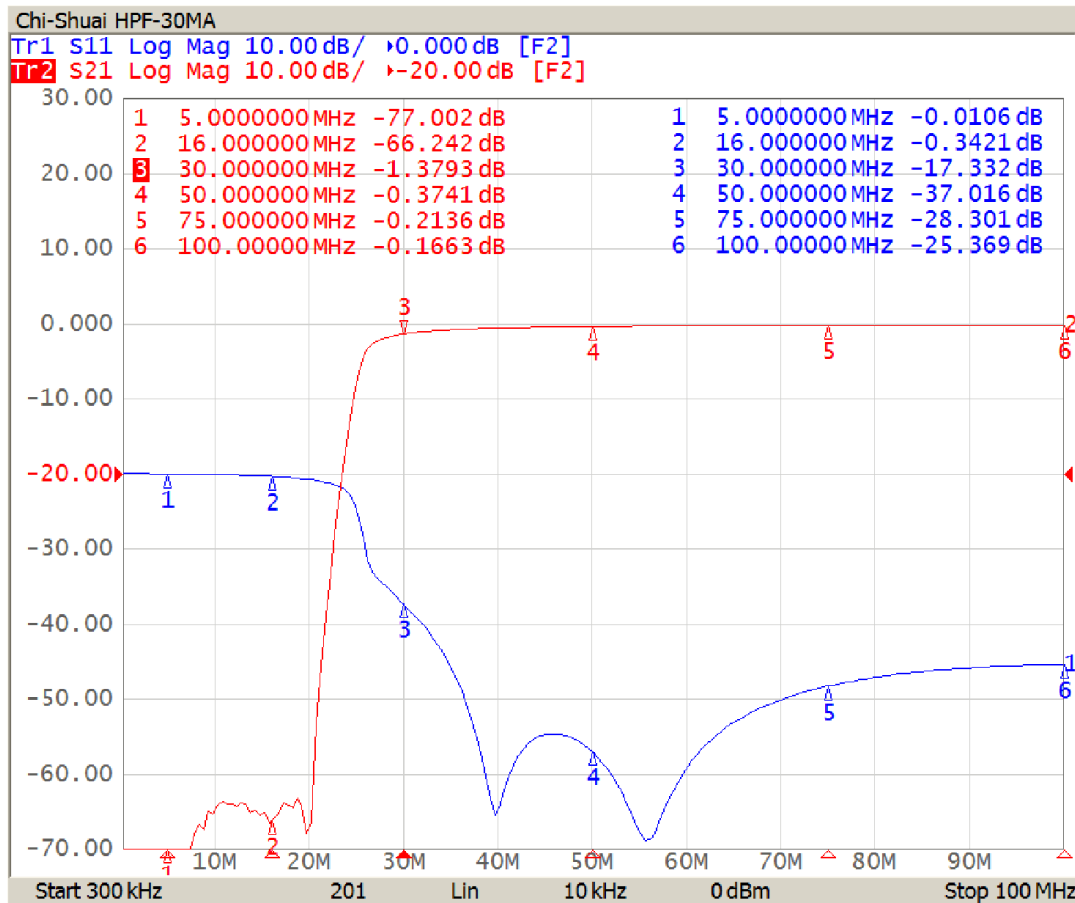


Fig.1

MODEL NO.	DATE	PREVIEW	PAGE/TOTAL
HPF-30MA High Pass Filter	20160516	V1.1	2/3



HPF-30MA

Insertion Loss and Rejection

Span: 1000MHz

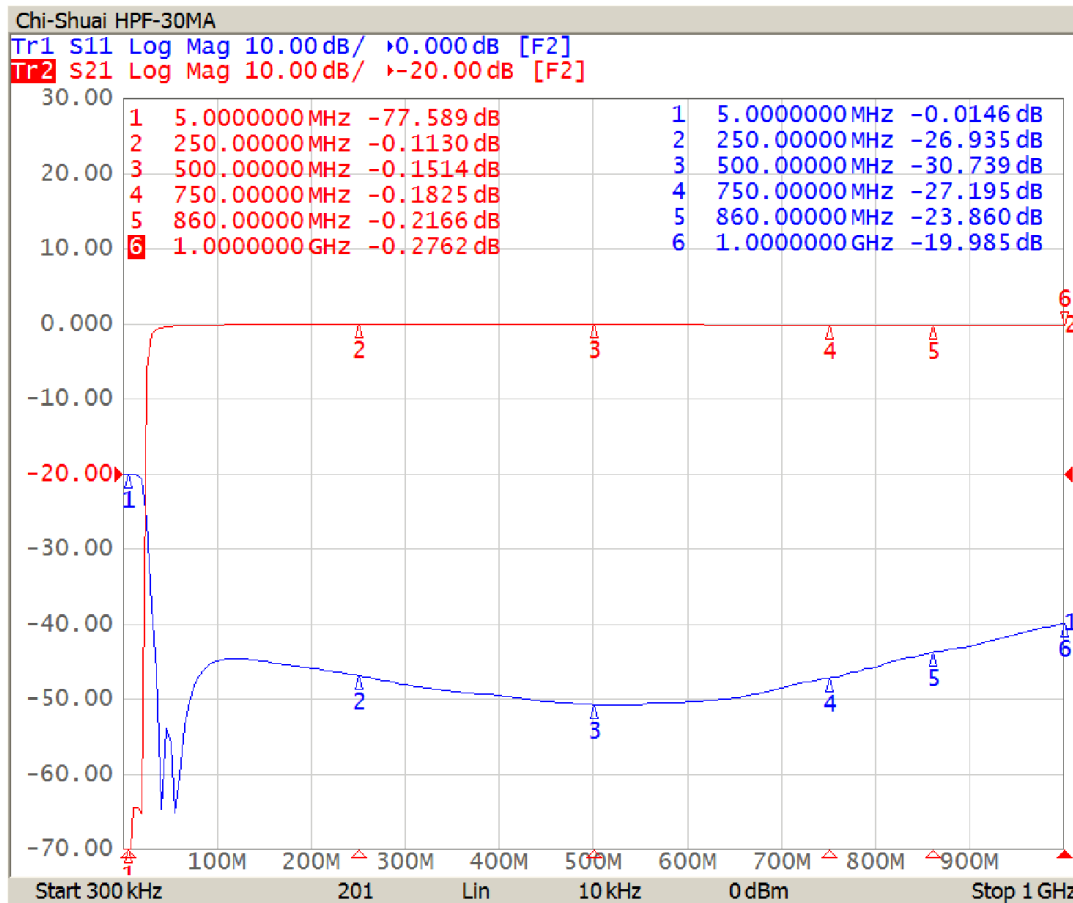


Fig.2

MODEL NO.	DATE	PREVIEW	PAGE/TOTAL
HPF-30MA High Pass Filter	20160516	V1.1	3/3